




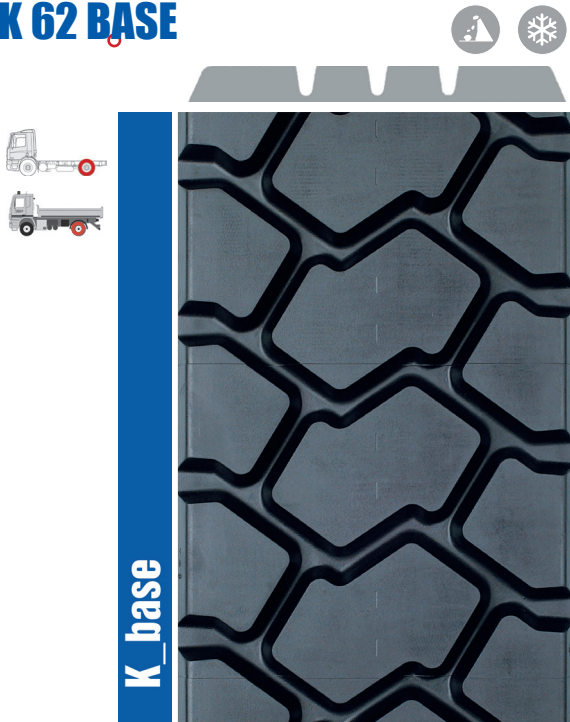


K 62 BASE

 mm	 mm	 mm	 kg/m	 m
240		19,5	4,99	
250		19,5	5,18	

**BESCHREIBUNG**

- Massives, querorientiertes Blockprofil
- Antriebsachsen von Baustellen- und Spezialfahrzeugen im härtesten Einsatz
- Auf den Einsatz abgestimmte Laufflächenmischung und ausgeprägter Untergummi beugen gegen Schnitt- und Karkassen-Verletzungen vor
- Gute Übertragung von Traktionskräften besonders auf unbefestigten Untergründen
- Sehr gute Selbstreinigung durch offene Profilstaltung
- Hervorragend geeignet für hohe Antriebsleistungen
- Gute Laufleistung in allen Einsätzen durch große Profiltiefe

ALTERNATIVEN

K46, K61, K207, K208, K212

FEATURES

- Solid cross-groove block-type tread
- Drive-axle tires for construction and special-purpose vehicles under difficult conditions
- The use of specially adapted tread compound and distinct foundation rubber help prevent cuts and other damage to casing
- Good transfer of traction forces, particularly on unpaved surfaces
- Very good self-cleaning due to open shoulder design
- Superbly suited for high propulsion power
- Good running properties in all uses due to large tread depth

ALTERNATIVES

K46, K61, K207, K208, K212